


HSK-A-SF Schrumpffutter
HSK-A-SF Shrink Fit Holder

MAX
50,000
min⁻¹

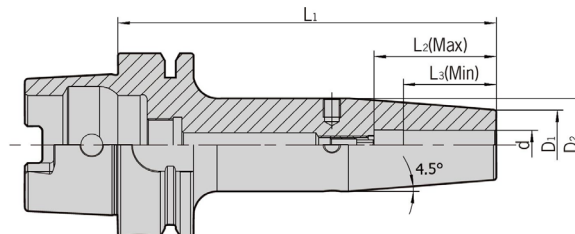


Einheit/Unit (mm)

Artikel Item	d	D1	D2	L1	L2 (Max)	L3 (Min)	Gewicht Weight
HSK63A-SF3-80	3	10	10	80	-	9	0,50
HSK63A-SF4-80	4	10	10	80	-	12	0,60
HSK63A-SF5-80	5	10	10	80	-	15	0,70
HSK63A-SF6-80	6	21	27	80	28	18	0,80
HSK63A-SF6-130	6	21	27	130	28	18	1,00
HSK63A-SF6-160	6	21	27	160	28	18	1,20
HSK63A-SF8-80	8	21	27	80	34	24	0,80
HSK63A-SF8-130	8	21	27	130	34	24	1,02
HSK63A-SF8-160	8	21	27	160	34	24	1,25
HSK63A-SF10-85	10	24	32	85	40	30	0,90
HSK63A-SF10-130	10	24	32	130	40	30	1,17
HSK63A-SF10-160	10	24	32	160	40	30	1,45
HSK63A-SF12-90	12	24	32	90	40	30	0,92
HSK63A-SF12-130	12	24	32	130	40	30	1,15
HSK63A-SF12-160	12	24	32	160	40	30	1,55
HSK63A-SF14-90	14	27	34	90	42	32	0,95
HSK63A-SF14-130	14	27	34	130	42	32	1,18
HSK63A-SF14-160	14	27	34	160	42	32	1,60
HSK63A-SF16-95	16	27	34	95	42	32	1,00
HSK63A-SF16-130	16	27	34	130	42	32	1,21
HSK63A-SF16-160	16	27	34	160	42	32	1,65
HSK63A-SF18-95	18	33	42	95	50	40	1,05
HSK63A-SF18-130	18	33	42	130	50	40	1,25
HSK63A-SF18-160	18	33	42	160	50	40	1,70
HSK63A-SF20-100	20	33	42	100	50	40	1,20
HSK63A-SF20-130	20	33	42	130	50	40	1,49
HSK63A-SF20-160	20	33	42	160	50	40	1,80
HSK63A-SF25-115	25	44	53	115	55	45	1,98
HSK63A-SF25-160	25	44	53	160	55	45	2,10
HSK63A-SF32-120	32	44	53	120	60	50	2,10
HSK63A-SF32-160	32	44	53	160	60	50	2,60

HSK-A-SF Schrumpffutter
HSK-A-SF Shrink Fit Holder

MAX
50,000
min⁻¹

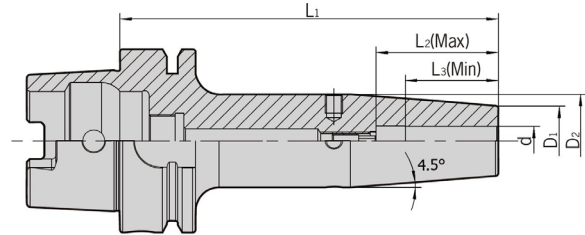

Einheit/unit (mm)

Artikel Item	d	D1	D2	L1	L2 (Max)	L3 (Min)	Gewicht Weight	
HSK100A-	SF6-85	6	21	27	85	28	18	2,00
	SF6-130	6	21	27	130	28	18	2,30
	SF6-160	6	21	27	160	28	18	2,62
	SF8-85	8	21	27	85	34	24	2,00
	SF8-130	8	21	27	130	34	24	2,30
	SF8-160	8	21	27	160	34	24	2,65
	SF10-90	10	24	32	90	40	30	2,20
	SF10-130	10	24	32	130	40	30	2,40
	SF10-160	10	24	32	160	40	30	2,70
	SF12-95	12	24	32	95	40	30	2,30
	SF12-130	12	24	32	130	40	30	2,50
	SF12-160	12	24	32	160	40	30	2,75
	SF14-95	14	27	34	95	42	32	2,35
	SF14-130	14	27	34	130	42	32	2,60
	SF14-160	14	27	34	160	42	32	2,85
	SF16-100	16	27	34	100	42	32	2,50
	SF16-130	16	27	34	130	42	32	2,80
	SF16-160	16	27	34	160	42	32	3,13
	SF18-100	18	33	42	100	50	40	2,55
	SF18-130	18	33	42	130	50	40	2,85
	SF18-160	18	33	42	160	50	40	3,21
	SF20-105	20	33	42	105	50	40	2,60
	SF20-130	20	33	42	130	50	40	2,90
	SF20-160	20	33	42	160	50	40	3,25
	SF25-115	25	44	53	115	55	45	2,80
	SF25-160	25	44	53	160	55	45	3,40
	SF32-120	32	44	53	120	60	50	3,20
	SF32-160	32	44	53	160	60	50	3,60

Merkmale

- Gewuchtet: G2,5; 25.000 U/m
- Rundlauf: < 0,003 mm.

Features

- *Balanced: G2,5; 25,000 rpm;*
- *Runout: < 0,003 mm.*