


BT-DHP Hydrodehnspannfutter
BT-DHP Hydraulic Chuck

MAX
35,000
min⁻¹

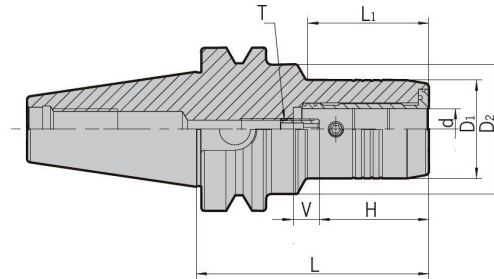


Einheit/Unit (mm)

Artikel Item	d	D1	D2	L	H	V	L1	T	Geeignete Spannzange Suit collet	Spann- schlüssel Wrench	Gewicht Weight	
BT30-	DHP6-70	6	28	45	70	27,5	10	28	M5X0,8	-	T04	0,68
	DHP8-70	8	30	45	70	27,5	10	28	M6X1	-	T04	0,71
	DHP10-75	10	32	45	75	32,5	10	38	M6X1	-	T04	0,73
	DHP12-75	12	34	45	75	37,5	10	36	M6X1	D12/OD12	T04	0,78
	DHP14-85	14	36	45	85	37,5	10	44	M6X1	-	T04	0,83
	DHP16-90	16	38	45	90	42,5	10	48	M8X1	-	T04	0,92
	DHP18-90	18	41	45	90	42,5	10	48	M8X1	-	T04	0,95
	DHP20-90	20	43	45	90	42,5	10	-	M8X1	D20/OD20	T04	0,98
BT40-	DHP6-65	6	28	50	65	27,5	10	23	M5X0,8	-	T04	1,26
	DHP6-90	6	28	50	90	27,5	10	44	M5X0,8	-	T04	1,42
	DHP6-140	6	28	50	140	27,5	10	44	M5X0,8	-	T04	2,16
	DHP8-65	8	30	50	65	27,5	10	23	M6X1	-	T04	1,26
	DHP8-90	8	30	50	90	27,5	10	39	M6X1	-	T04	1,43
	DHP8-140	8	30	50	140	27,5	10	44	M6X1	-	T04	2,20
	DHP10-65	10	32	50	65	32,5	10	23	M6X1	-	T04	1,26
	DHP10-90	10	32	50	90	32,5	10	44	M6X1	-	T04	1,45
	DHP10-140	10	32	50	140	32,5	10	44	M6X1	-	T04	2,40
	DHP12-65	12	34	50	65	37,5	10	23	M6X1	D12/OD12	T04	1,26
	DHP12-90	12	34	50	90	37,5	10	44	M6X1	D12/OD12	T04	1,46
	DHP12-140	12	34	50	140	37,5	10	44	M6X1	D12/OD12	T04	2,60
	DHP14-65	14	36	50	65	37,5	10	23	M6X1	-	T04	1,26
	DHP14-90	14	36	50	90	37,5	10	44	M6X1	-	T04	1,48
	DHP14-140	14	36	50	140	37,5	10	44	M6X1	-	T04	2,80
	DHP16-65	16	38	50	65	42,5	10	23	M8X1	-	T04	1,27
	DHP16-90	16	38	50	90	42,5	10	48	M8X1	-	T04	1,50
	DHP16-140	16	38	50	140	42,5	10	48	M8X1	-	T04	2,80
	DHP18-75	18	41	50	75	42,5	10	30	M8X1	-	T04	1,35
	DHP18-90	18	41	50	90	42,5	10	48	M8X1	-	T04	1,53
	DHP18-140	18	41	50	140	42,5	10	48	M8X1	-	T04	2,85
	DHP20-75	20	43	50	75	42,5	10	30	M8X1	D20/OD20	T04	1,40
	DHP20-90	20	43	50	90	42,5	10	48	M8X1	D20/OD20	T04	1,56
	DHP20-140	20	43	50	140	42,5	10	48	M8X1	D20/OD20	T04	2,89
DHP25-100	25	57	-	100	51	10	73	M16X1	-	T05	2,05	
DHP25-135	25	57	-	135	51	10	108	M16X1	-	T05	2,75	
DHP32-105	32	63	-	105	55	10	-	M16X1	D32/OD32	T05	2,28	
DHP32-135	32	63	-	135	55	10	-	M16X1	D32/OD32	T05	2,95	

BT-DHP Hydrodehnspannfutter
BT-DHP Hydraulic Chuck

MAX
35,000
min⁻¹

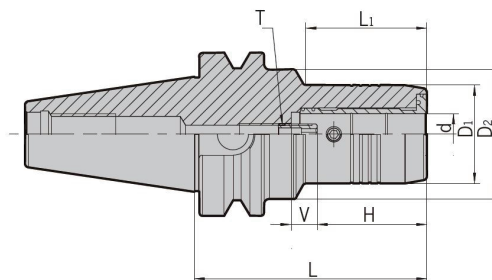

Einheit/Unit (mm)

Artikel Item	d	D1	D2	L	H	V	L1	T	Geeignete Spannzange Suit collet	Spann- schlüssel Wrench	Gewicht Weight	
BT50-	DHP6-90	6	28	50	90	27,5	10	32	M5X0,8	-	T04	4,03
	DHP6-120	6	28	50	120	27,5	10	44	M5X0,8	-	T04	4,35
	DHP6-140	6	28	50	140	27,5	10	44	M5X0,8	-	T04	4,65
	DHP8-90	8	30	50	90	27,5	10	32	M6X1	-	T04	4,05
	DHP8-120	8	30	50	120	27,5	10	40	M6X1	-	T04	4,42
	DHP8-140	8	30	50	140	27,5	10	44	M6X1	-	T04	4,68
	DHP10-90	10	32	50	90	32,5	10	32	M6X1	-	T04	4,06
	DHP10-120	10	32	50	120	32,5	10	44	M6X1	-	T04	4,41
	DHP10-140	10	32	50	140	32,5	10	44	M6X1	-	T04	4,71
	DHP12-90	12	34	50	90	37,5	10	32	M6X1	D12/OD12	T04	4,07
	DHP12-120	12	34	50	120	37,5	10	44	M6X1	D12/OD12	T04	4,43
	DHP12-140	12	34	50	140	37,5	10	44	M6X1	D12/OD12	T04	4,73
	DHP14-90	14	36	50	90	37,5	10	32	M6X1	-	T04	4,07
	DHP14-120	14	36	50	120	37,5	10	44	M6X1	-	T04	4,43
	DHP14-140	14	36	50	140	37,5	10	44	M6X1	-	T04	4,73
	DHP16-90	16	38	50	90	42,5	10	32	M8X1	-	T04	4,08
	DHP16-120	16	38	50	120	42,5	10	48	M8X1	-	T04	4,43
	DHP16-140	16	38	50	140	42,5	10	48	M8X1	-	T04	4,73
	DHP18-90	18	41	50	90	42,5	10	32	M8X1	-	T04	4,1
	DHP18-120	18	41	50	120	42,5	10	48	M8X1	-	T04	4,47
DHP18-140	18	41	50	140	42,5	10	48	M8X1	-	T04	4,75	
DHP20-90	20	43	50	90	42,5	10	32	M8X1	D20/OD20	T04	4,11	
DHP20-120	20	43	50	120	42,5	10	48	M8X1	D20/OD20	T04	4,5	
DHP20-140	20	43	50	140	42,5	10	48	M8X1	D20/OD20	T04	4,79	
DHP25-105	25	57	-	105	51	10	67	M16X1	-	T05	4,6	
DHP25-150	25	57	-	150	51	10	112	M16X1	-	T05	5,4	
DHP32-115	32	63	-	115	55	10	77	M16X1	D32/OD32	T05	4,86	
DHP32-150	32	63	-	150	55	10	112	M16X1	D32/OD32	T05	5,67	

Hinweis: Spannzange muss separat bestellt werden.

Notice: Collet shall be ordered separately.

Merkmale

- Geeignet für Hochgeschwindigkeits- und Präzisionszerspanung
- Gewuchtet: G2,5; 25.000 U/m
- Rundlauf: < 0,003 mm.

Features

- Suitable for high-speed and high precision cutting;
- Balanced: G2,5; 25,000 rpm;
- Runout: < 0,003 mm.