


BT-DHP Ultraschlanke Hydrodehnspannfutter
BT-DHP Super Slim Hydraulic Chuck

MAX
35,000
min⁻¹

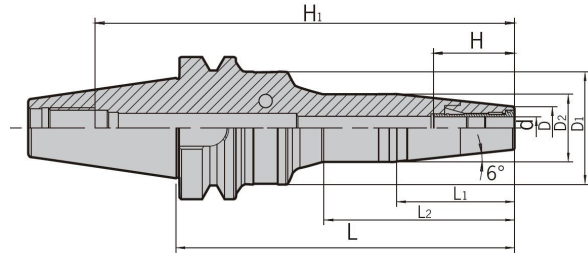

Einheit/Unit (mm)

Artikel Item	d	D	D1	D2	L	L1	L2	H	H1	T	Geeignete Spannzange Suit collet	Spann- schlüssel Wrench	Gewicht Weight	
BT30-	DHP6S-90	6	14	42	25	90	50	-	25	113	M5X0,8	-	T04	0,65
	DHP8S-90	8	17	42	28	90	50	-	31	113	M6X1	-	T04	0,67
	DHP10S-90	10	19	44	30	90	50	-	33	113	M6X1	-	T04	0,70
	DHP12S-90	12	21	46	32	90	50	-	36	113	M6X1	-	T04	0,72
BT40-	DHP6S-110	6	14	38	27	110	60	-	25	145	M5X0,8	-	T04	1,30
	DHP6S-150	6	14	48	26	150	57	85	25	185	M5X0,8	-	T04	1,60
	DHP8S-110	8	17	40	30	110	60	-	31	145	M6X1	-	T04	1,40
	DHP8S-150	8	17	50	28	150	52	85	31	185	M6X1	-	T04	1,70
	DHP10S-110	10	19	42	32	110	60	-	33	145	M6X1	-	T04	1,40
	DHP10S-150	10	19	50	30	150	52	85	33	185	M6X1	-	T04	1,70
	DHP12S-110	12	21	44	34	110	60	-	36	145	M6X1	D12/OD12	T04	1,40
	DHP12S-150	12	21	50	32	150	52	85	36	185	M6X1	D12/OD12	T04	1,80
BT50-	DHP6S-150	6	14	52	26	150	57	83	25	83	M5X0,8	-	T04	4,20
	DHP6S-200	6	14	56	26	200	57	100	25	100	M5X0,8	-	T04	4,60
	DHP8S-150	8	17	54	28	150	52	83	31	83	M6X1	-	T04	4,30
	DHP8S-200	8	17	58	28	200	52	100	31	100	M6X1	-	T04	4,70
	DHP10S-150	10	19	56	30	150	52	83	33	83	M6X1	-	T04	4,30
	DHP10S-200	10	19	60	30	200	52	100	33	100	M6X1	-	T04	4,80
	DHP12S-150	12	21	58	32	150	52	83	36	83	M6X1	D12/OD12	T04	4,40
	DHP12S-200	12	21	62	32	200	52	100	36	100	M6X1	D12/OD12	T04	4,80

Hinweis: Spannzange muss separat bestellt werden.

Notice: Collet shall be ordered separately.

Merkmale

- Geeignet für Hochgeschwindigkeits- und Präzisionszerspanung
- Gewuchtet: G2,5; 25.000 U/m
- Rundlauf: < 0,003 mm.
- Störungsfrei durch schlankes Design.

Features

- Suitable for high-speed and high precision cutting;
- Balanced: G2,5; 25,000 rpm;
- Runout: < 0,003 mm.
- Interference-free due to slim design.